

ReliableParts

HVAC SUMMER SAVINGS

MAY 1 - AUG 30 2023


Please click on the part listing to view the product online.



CD100A Combustible Gas Leak Detector

The CD100A is designed to detect combustible gas leaks in residential and small commercial applications. Sensing leading combustible (Natural Gas, Propane, etc), non-combustible and toxic gases and has < 50ppm methane sensitivity.

\$171⁶⁰

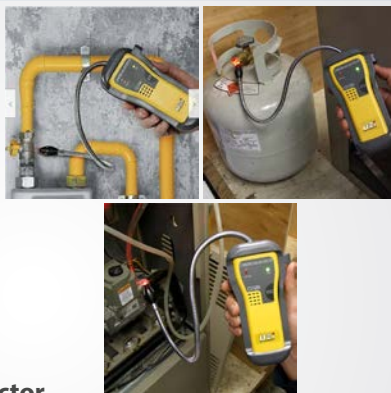

DT302

Dual Input Logging Thermometer

This series of Digital Thermometers offers a unique combination of features including logging capabilities with 9,999 memory positions and a USB interface and software, two inputs; offering relative and differential readings. The Apollo also offers a solution to storing probes and is manufactured to conform to the IP67 standard, meeting performance expectations of water submersion and high-pressure dust resistance.



\$155⁷⁶



W2974 Performance Tool® 5-Function Digital Multimeter

5-Function Digital Multimeter (W2974) by Performance Tool®. Get your job done right every time with top-of-the-line electrical testing tools showcased on our virtual shelves!

\$7⁹²



DM10T

Supco Economy Digital Multimeter with Temperature Reading, 32 to 74 Degrees F, 750 AC Volts

The Digital Multimeter provides an economical solution to your everyday electrical and temperature measurement needs.

Features/Benefits

- 10 Amps DC
- 1000 Volts DC
- 2M W Resistance
- 750 Volts AC
- Continuity
- Temperature



\$18⁴⁸

FASCO

Please click on the part listing to view the product online.



D721

Fasco 1/4-1/5-1/6 HP
Fan & Blower Motor
1075 RPM, 3 Speed
115 Volts, 48 Frame
OAO

\$109⁵⁶



FM55

Fasco Flex Mount
Bracket for 5.5"
Dia Mtr, BC 9"
& 10.18"

\$19⁸⁰

Fan & Blower Motors

D701 - 1/2-1/3-1/4-1/5 HP, 1075 RPM, 4 Speed, 115 V, 48 Frame, OAO	\$120¹²
D725 - 1/4-1/6-1/8 HP, 1075 RPM, 3 Sp., 208/230 V, 48 Frame, Semi Enclosed	\$101⁶⁴
D727 - 1/3-1/4-1/5 HP, 1075 RPM, 3 Speed, 115 V, 48 Frame, OAO	\$113⁵²
D728 - 3/4-1/2-1/3 HP, 1075 RPM, 3 Speed, 115 V, 48 Frame, OAO	\$151⁸⁰
D923 - 1/3-1/4-1/5 HP, 1075 RPM, 3 Speed, 208/230 V, 48 Frame, OAO	\$125⁴⁰

Condenser Fan Motors

D7908 - 1/3 HP, 1075 RPM, 208/230 V, 48 Frame, TEAO	\$97⁶⁸
D7909 - 1/4 HP, 1075 RPM, 208/230 V, 48 Frame, TEAO	\$91⁰⁸
D909 - 1/4 HP, 1075 RPM, 208/230 V, 48 Frame, TEAO	\$100³²
D917 - 1/6 HP, 1075 RPM, 208-230 V, 48 Frame, TEAO	\$106⁹²
D929 - 3/4 HP, 1075 RPM, 208/230 V, 48 Frame, Semi Enclosed	\$163⁶⁸
D934 - 1/4 HP, 825 RPM, 208-230 V, 48 Frame, TEAO	\$149¹⁶
D936 - 1/3 HP, 825 RPM, 208-230 V, 48 Frame, TEAO	\$205⁹²
FE1026SC - Century 5 5/8" Diameter, 1/4 HP, 208-230 V, 1075 RPM	\$84⁴⁸



ICM271C - ICM Controls Solid State Fan Blower Control. Specifically designed to replace popular gas furnace centers. Input: Voltage - 18-30 VAC, Contact Ratings: N.O.: 20 amps, N.C.: 10 amps, Fixed Time Delays: Heat ON: 75 seconds, Heat OFF: 105 seconds, Cool OFF: 90 seconds.

\$55⁴⁴

ICM280 - OEM Replacement Furnace Control Board - Goodman, Janitrol, TI, White-Rodgers and UTEC

\$101⁶⁴

SC2010L - SimpleComfort® Non-programmable Wall Thermostat, Single-stage Heat/Cool, Single-stage Heat Pump

\$58⁰⁸

→ **SC1001** is the previous version of SC2010L and is available in limited quantity only

\$47⁵²



42521-001 - Armstrong Condenser Motor
1/5 HP, 208/230 V, 1075 RPM

\$259⁹⁵



Honeywell

ST9120U1011 - Honeywell Universal Electronic
Fan Timer with Adjustable Heat

\$195³⁶



BA-1 - Brite Alum Liquid Coil Cleaner and Brightener, 1 gal.

\$22⁴⁴

BLO-1 - BLO-1 Blowout Evaporator/Condenser Coil Cleaner, 20 oz. (NOT FOR SALE IN CALIFORNIA)

\$15²⁹

HP-1 - HP Evaporator and Condenser Coil Cleaner, Water-Based Turquoise Liquid

\$15⁸⁴

FCC-1 - FCC-1 Foaming Cooling Coil Cleaner, 18 oz. Aerosol Can

\$9²⁴



CD30+5X370R - Supco Round Dual Run Capacitor, Capacitor (MFD): 30+5, 370VAC, Type Two

\$3⁹⁶

CD30+5X440R - Supco Round Dual Run Capacitor, Capacitor (MFD): 30+5, 440VAC, Type Two

\$4⁰²

CD35+5X370R - Supco Round Dual Run Capacitor, Capacitor (MFD): 35+5, 370VAC, Type Two

\$3⁹⁶

CD35+5X440R - Supco Round Dual Run Capacitor, Capacitor (MFD): 35+5, 440VAC, Type Two

\$5²⁸

CD35+7.5X440R - Supco Round Dual Run Capacitor, Capacitor (MFD): 35+7.5, 440VAC, Type Two

\$5³⁶

CD40+5X440R - Supco Round Dual Run Capacitor, Capacitor (MFD): 40+5, 440VAC, Type Two

\$5²⁸

CD45+5X440R - Supco Round Dual Run Capacitor, Capacitor (MFD): 45+5, 440VAC, Type Two

\$5⁸²

CD50+5X440R - Supco Round Dual Run Capacitor, Capacitor (MFD): 50+5, 440VAC, Type Two

\$6⁶⁰

CD55+5X440R - Supco Round Dual Run Capacitor, Capacitor (MFD): 55+5, 440VAC, Type Two

\$6⁷⁰

CD60+5X440R - Supco Round Dual Run Capacitor, Capacitor (MFD): 60+5, 440VAC, Type Two

\$6⁷⁵

CD80+5X440R - Supco Round Dual Run Capacitor, Capacitor (MFD): 80+5, 440VAC, Type Two

\$9²⁴

CR50X440R - Supco Round Run Capacitor, Capacitor (MFD): 50, 440 VAC, Type Two

\$5²⁸

CR5X370 - Supco Oval Run Capacitor, Capacitor (MFD): 5, 370 VAC, Type Two

\$1³²

CR5X440 - Supco Oval Run Capacitor, Capacitor (MFD): 5, 440 VAC, Type Two

\$1⁴²

CR7.5X370 - Supco Oval Run Capacitor, Capacitor (MFD): 7.5, 370 VAC, Type Two

\$1⁵⁰

CR7.5X440 - Supco Oval Run Capacitor, Capacitor (MFD): 7.5, 440 VAC, Type Two

\$1⁷⁰

CR10X370 - Supco Oval Run Capacitor, Capacitor (MFD): 10, 370 VAC, Type Two

\$1⁷⁵

CR10X440 - Supco Oval Run Capacitor, Capacitor (MFD): 10, 440 VAC, Type Two

\$2⁰³

SPP5 - Super Boost Hard Start Kit, Capacitor size (μF): 43 to 53 MFD

\$6⁶⁰

SPP6 - Super Boost Hard Start Kit, Capacitor size (μF): 130 to 156 MFD

\$9⁰⁰





Please click on the part listing to view the product online.



947KIT - Super Seal Sealant Advanced for small systems up to 1.5 tons

\$46⁴⁰



40825F - 5 5/8" Dia. High Temp. Condenser Fan Motor, 1/4 Hp, 208-230 Volts, 825 RPM

\$132⁰⁰

43583 - 48 Frame Direct Drive Blower Motor, 1/4 Hp, 115 Volts, 1075 RPM

\$84⁴⁸

43586 - 48 Frame Direct Drive Blower Motor, 1/3 Hp, 208-230 Volts, 1075 RPM

\$89⁷⁶

43587 - 48 Frame Direct Drive Blower Motor, 1/2 Hp, 115 Volts, 1075 RPM

\$105⁶⁰

43588 - 48 Frame Direct Drive Blower Motor, 1/2 Hp, 208-230 Volts, 1075 RPM

\$106⁹²

43727B - 5 5/8" Dia. High Temp. Condenser Fan Motor, 1/6 Hp, 208-230 Volts, 1075 RPM

\$76⁵⁶

43732 - 5 5/8" Diameter Condenser Fan Motor, 1/4 Hp, 208-230 Volts, 1075 RPM

\$79²⁰

43733 - 5 5/8" Diameter Condenser Fan Motor, 1/3 Hp, 208-230 Volts, 1075 RPM

\$92⁴⁰

43734F - 5 5/8" Dia. High Temp. Condenser Fan Motor, 1/2 Hp, 208-230 Volts, 1075 RPM

\$109⁵⁶

45458B - 5 5/8" Dia. Multi-Horsepower Condenser Fan Motor, 208-230 Volts, 1075 RPM

\$84⁴⁸

45488B - 5 5/8" Dia. Multi-Horsepower Condenser Fan Motor, 208-230 Volts, 825 RPM

\$104²⁸



C125A - Contactor 1 Pole 25 Amps 24 Coil Voltage

\$6⁶⁰

C130A - Contactor 1 Pole 30 Amps 24 Coil Voltage

\$6⁶⁰

C130B - Contactor 1 Pole 30 Amps 120 Coil Voltage

\$6⁶⁰

C140A - Contactor 1 Pole 40 Amps 24 Coil Voltage

\$9²⁴

C140B - Contactor 1 Pole 40 Amps 120 Coil Voltage

\$7⁹²

C225A - Contactor 2 Pole 25 Amps 24 Coil Voltage

\$7⁹²

C230A - Contactor 2 Pole 30 Amps 24 Coil Voltage

\$7⁹²

C230B - Contactor 2 Pole 30 Amps 120 Coil Voltage

\$7⁹²

C230C - Contactor 2 Pole 30 Amps 208/240 Coil Voltage

\$7⁹²

C240A - Contactor 2 Pole 40 Amps 24 Coil Voltage

\$9²⁴



PF12440 - Class II Foot Mount Transformer Primary 120 Volts Secondary 24 Volts V.A. Rating 40VA

\$13²⁰

PF40350 - Foot Mount Transformer Primary 120/208/240 V Secondary 24 Volts V.A. Rating 50VA

\$19⁸⁰

PF42440 - Foot Mount Transformer Primary 120/208/240 V Secondary 24 Volts V.A. Rating 40VA

\$13²⁰

PF42450 - Foot Mount Transformer Primary 120/208/240/480 V Secondary 24 Volts V.A. Rating 50VA

\$35⁶⁴

POC10A - Titan HD Run Capacitor 10 Mfd 370 Volt Oval

\$5³⁷

POC5A - Titan HD Run Capacitor 5 Mfd 370 Volt Oval

\$2⁷⁹

POC7.5A - Titan HD Run Capacitor 7.5 Mfd 370 Volt Oval

\$4⁰²

POCF10A - Titan HD Run Capacitor 10 Mfd 440/370 Volt Oval

\$5⁴⁶

POCF5A - Titan HD Run Capacitor 5 Mfd 440/370 Volt Oval

\$4⁴⁸

POCF7.5A - Titan HD Run Capacitor 7.5 Mfd 440/370 Volt Oval

\$4⁸²



PRCD305A - Titan HD Run Capacitor 30+5 Mfd 370 Volt Round

\$10³⁴

PRCD355A - Titan HD Run Capacitor 35+5 Mfd 370 Volt Round

\$10⁵¹

PRCF50A - Titan HD Run Capacitor 50 Mfd 440/370 Volt Round

\$14⁷⁰

PRCFD305A - Titan HD Run Capacitor 30+5 Mfd 440/370 Volt Round

\$10⁷¹

PRCFD355A - Titan HD Run Capacitor 35+5 Mfd 440/370 Volt Round

\$11²¹



PRCFD3575A - Titan HD Run Capacitor 35+7.5 Mfd 440/370 Volt Round

\$9⁵⁴

PRCFD405A - Titan HD Run Capacitor 40+5 Mfd 440/370 Volt Round

\$11⁹¹

PRCFD455A - Titan HD Run Capacitor 45+5 Mfd 440/370 Volt Round

\$14²⁶

PRCFD505A - Titan HD Run Capacitor 50+5 Mfd 440/370 Volt Round

\$15⁵⁵

PRCFD555A - Titan HD Run Capacitor 55+5 Mfd 440/370 Volt Round

\$15⁰⁶



PRCFD605A - Titan Hd Run Capacitor 60+5 Mfd 440/370 Volt Round

\$15⁷²

PRCFD805A - Titan Hd Run Capacitor 80+5 Mfd 440/370 Volt Round

\$29⁰⁴



C340A - Contactor 3 Pole 40 Amps 24 Coil Voltage

\$17³⁸

FC90113 - Packard Fan Center, 120 Volt, Spdt Relay

\$25⁷⁴

OGD1016 - S5 5/8 Inch Diameter Motor 208-230 Volts 1075 RPM

\$125⁰⁰

TR001 - Bracket To Adapt 48 Frame Motors To Trane Cap-Can Motor Mounting

\$8⁵⁹



L14000208L

Vulkan Lokring Refrigerant Recovery Bag

Max Capacity: 12.34 oz / 350 g 1.45psi / 0.10 bar

\$62⁰⁴



98000

Lucas Milhaupt Silvaloy Braze 450

Sluggish general purpose alloy used for joining ferrous and non-ferrous metals.

Can fill large joint clearances

Low temperature | Cadmium-Free

Made in USA

\$29⁰⁴



SW-SS05F14K

Sil Sol - Premium 5% Sil-Phos Brazing Rod - Pack of 15

\$25⁰⁸



SW-SS1512K

Sil Sol - Premium 15% Sil-Phos Brazing Rod - Pack of 20

\$56⁷⁶



T160

UEi Test Instruments Pocket Sized Dial Thermometr w/ 5 Inch Stem

Fahrenheit scale thermometer with 1 inch dial and 5 inch stem with a -40° to 160°F range.

\$6⁶⁰

AAC

UEi Test Equipment AAC

Alligator Clips

friction-fit alligator clips slip over the tip of most test leads (2mm). Works with DL369, DL379, DL389, DL49, DL99B, DL235, DM383B, DM384, DM393, DM391, DM397.

\$6⁶⁰



550B

Digital Pocket Thermometer - NSF Listed

The 550B Digital Pocket Thermometer has a new protective boot with a built-in magnet. The 550B offers all the required features and ranges needed for today's HVAC applications including a water resistant ergonomic head for easy display readings. Housed in a hard carrying case sleeve that also serves as a pocket clip, the stem can be slipped into the loop (built-into the metal clip) to offer additional support or to insulate from the heat of the measured substance.

Features:

- Protective boot
- Magnetic mount
- Water resistant
- Min/Max
- Data hold
- Auto power off

Applications:

- Measure ambient temperatures
- Measure liquid temperatures

Specifications:

- Accuracy $\pm 1.8^{\circ}\text{F}$ in the range -22°F to 302°F otherwise $\pm 4^{\circ}\text{F}$
- Resolution $\pm 0.1^{\circ}\text{F}$ for -19.048° to 199.9°F otherwise $\pm 1^{\circ}\text{F}$ from 200°F to 300°F
- Update Rate Approximately 1 second
- Certification CE and NSF listed
- Battery AB13, (SR44W)

\$22⁴⁴

